

SensoMAG MCP50 Manual Call Point

EN54-11

Description

SensoMAG MCP50 is a manual call point designed to work in conventional fire alarm systems. The call point has a resettable fragile (flexible) working element to ensure reliable and safe operation.


The LED indication informs the user for fire and test events.



Technical and Environmental Specifications

Operating voltage	9 ÷ 30 VDC
Nominal operating voltage	24 VDC
Current consumption in alarm state	23mA/15V; 38mA/24V; 48mA/30V
Installation wires	0.4mm ² ÷ 2.0mm ²
Operation temperature	-10°C ÷ +60°C
Relative humidity	≤93% @ +40°C
Type of the frangible element	A
Material (plastic), color	ABS, red
Degree of protection	IP40
Dimensions	90x57x90mm
Weight	150g

CE₁₉
1293
DoP No: 091

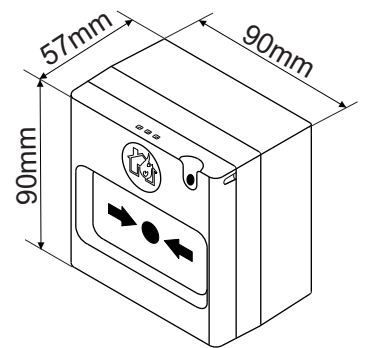

Packing Information

- **Packing box** - Kit of 1 unit SensoMAG MCP50 and 1 unit special tool for test and reset; dimensions 96x96x65 mm
- **Carton box** - 48 kits of SensoMAG MCP50, dimensions 486x295x196 mm

Compatible Product Range


- **MAG2, MAG2P** - Conventional Fire Alarm Panel, 2 fixed zones
- **MAG4, MAG4P** - Conventional Fire Alarm Panel, 4 fixed zones
- **MAG8** - Conventional Fire Alarm Panel, 8 fixed zones
- **MAG8Plus** - Conventional Fire Alarm Panel, 8 fixed zones, expandable to 16
- **Protective plastic cover** - Option for additional protection of the working element

Contact Information:

SensoMAG MCP50 Manual Call Point

EN54-11

● Connection Diagrams

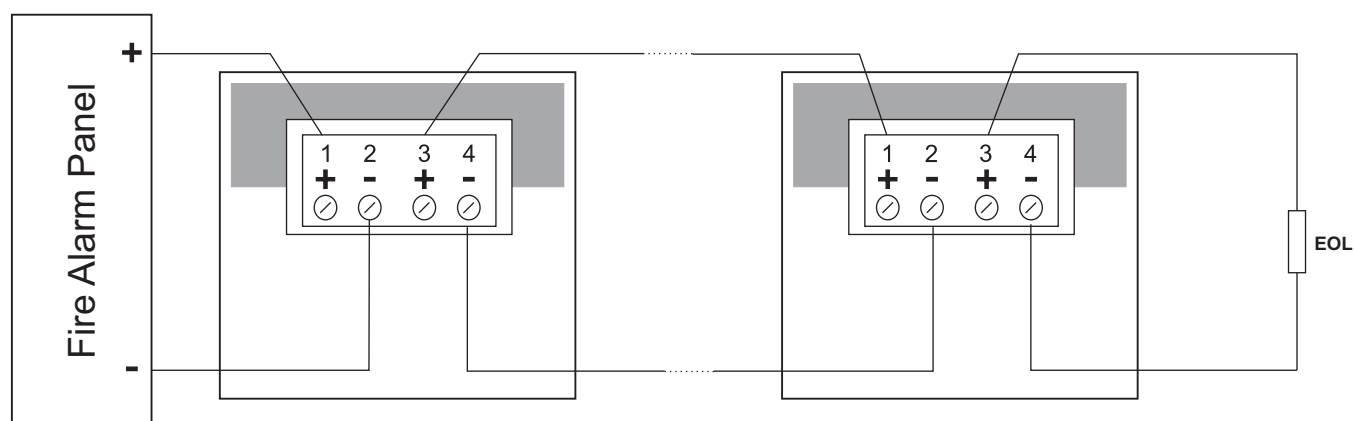

● Contact Information:

